




由易损件到长寿命周期的完美体验


触点防氧化保护、过流保护、过温保护、防护等级IP65、体积小、使用寿命长等传统 电磁式接触器无法具备的功能。


DCC24-C125	DCC48-C300	DCC80-C300
24V	48V	80V
18V	36V	60V
30V	60V	100V
125A	300A	300A
-40~50°C		
IP65		
129*60*33mm		
<300g		
EN61000-6-2:2005 EN61000-6-4:2007		
SAEJ1455-2017 SAEJ18105-2015 SAEJ1378-1988		
IEC60947-1:2011 IEC60947-4-1:2001		
	24V 18V 30V 125A EN61000-6-2 SAEJ1455-20	24V 48V 18V 36V 30V 60V 125A 300A -40~50°C IP65 129*60*33mm <300g EN61000-6-2:2005 EN61000-6-4:2007 SAEJ1455-2017 SAEJ18105-2015 SAEJ1

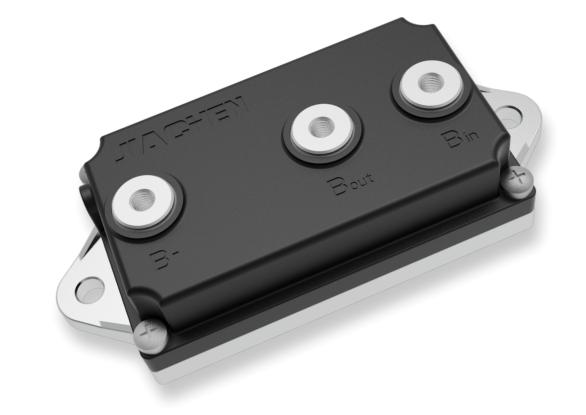









触点防氧化保护、过流保护、过温保护、防护等级IP65、体积小、使用寿命长等传统电磁式接触器无法具备的功能。

额定输入电压	24V/48V/80V
最低输入电压	18V/36V/60V
最高输入电压	30V/60V/100V
工作温度	-40~50℃
储存温度	-40~85°C
R寸	129*60*33mm
重量	< 300g

电压范围	24-80 V
最大连续电流	125-300A
工作温度	-40~50°C
防护等级	1P65

